


LTR

SPECIFICATION

W	WATER PLACEMENT	#51tr/MIN @ 40 PSI
A	AIR PLACEMENT	11 CFM @ 100 PSI
E	ELECTRICAL PLACEMENT	90 AMP, 3 PHASE @415 VOLTS

## THREE PHASE


UNIT WEIGHT	
EMPTY	FULL
1043 kg	4672 kg

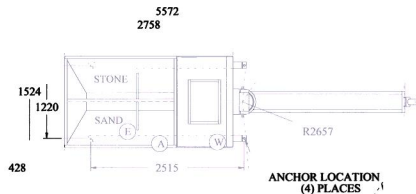

DESIGN OF CONCRETE PAD & METHOD OF ANCHORING WILL DEPEND ON LOCAL CONDITIONS SUCH AS WIND LOAD, SOIL STABILITY, ETC.

CONSULT YOUR LOCAL ENGINEER FOR EXACT CONCRETE PAD DESIGN.

MIXER ROTATION = 170°  
When optional swivel is fitted

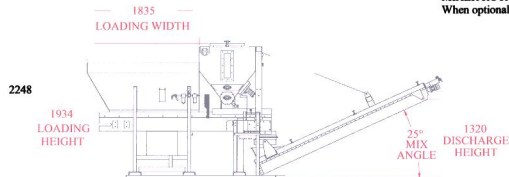

TITLE. CONCRETE DISPENSER SCD2-50

DATE. 15/10/2002

PART No. PART NUMBER

DRG. No. SCD2-50

DRG. BY. R.A.Calder SCALE. NONE

COPYRIGHT.

This drawing is the property of ARMCON Ltd and must not be Copied or reproduced without Written consent.

**ARMCON**  
**cementech**  
**EUROPE**